

WO9944095

Publication Title:

IMPROVED DISPLAY

Abstract:

Abstract of WO9944095

A device which selectively diffuses light for use as a f0a n independent display or in conjuncture with multileveled imaging systems.

Data supplied from the esp@cenet database - Worldwide

Courtesy of <http://v3.espacenet.com>



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G02F 1/137, 1/1337, G02B 27/22, H04N 13/00	A1	(11) International Publication Number: WO 99/44095 (43) International Publication Date: 2 September 1999 (02.09.99)
(21) International Application Number: PCT/NZ99/00021 (22) International Filing Date: 23 February 1999 (23.02.99) (30) Priority Data: 329834 24 February 1998 (24.02.98) NZ PCT/NZ98/00098 8 July 1998 (08.07.98) NZ (71)(72) Applicants and Inventors: WITEHIRA, Pita [NZ/NZ]; Devine Road, R.D., 3, Hamilton (NZ). ENGEL, Gabriel, Damon [US/NZ]; P.O. Box 784, Cambridge (NZ).		(81) Designated States: AU, BR, CA, CN, CZ, DE, DK, ES, GB, IL, JP, KP, KR, MX, NZ, RU, SE, SG, US, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: IMPROVED DISPLAY <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <p>a</p> </div> <div style="text-align: center;"> <p>b</p> </div> </div> (57) Abstract <p>A device which selectively diffuses light for use as an independent display or in conjuncture with multileveled imaging systems.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

IMPROVED DISPLAY

TECHNICAL FIELD

This invention relates to improvements in displays.

Specifically the present invention will be described for use in liquid
5 crystal display screens. However, it should be appreciated by those
skilled in the art that other applications may be considered and
reference to liquid crystal displays only should in no way be seen
as limiting.

10 BACKGROUND ART

Liquid crystal displays are popular types of display screens. They
are commonly used as display screens for laptop computers, where
the size and weight of the screen and associated computer is
important. Smaller size liquid crystal displays are also well known
15 in numerous applications other than computer screen displays.

A liquid crystal display is in simple terms constructed from four
layers of material and a large number of liquid crystals. Normally
a display is formed firstly by placing a polariser on one surface of
an alignment layer. Liquid crystals are placed between the first
20 alignment layer and a second alignment layer used to retain liquid
crystals in place. Lastly, a second polariser is placed on the
remaining outside surface of the second alignment layer.

When the screen is in use, an electric field is applied to selected
regions of the liquid crystal held within the alignment layers.

25 Under normal conditions unpolarised light is projected at the first
polariser. Polarised light is transmitted through the first polariser

into the first alignment layer. Next this polarised light is transmitted through the liquid crystals of the display.

The liquid crystals used are optically active and will twist the polarised light through a set angle. The alignment layers used
5 ensure the liquid crystals are orientated in a parallel fashion, usually in line with the polarizer orientation, imposing light transmitted through the crystals with the same twist or deviation.

Alignment layers in conventional LC displays are microscopic parallel grooved lines achieved by rubbing the layer with a fine
10 device in a single direction.

Lastly, the twisted polarised light is transmitted through the last polarising layer. The last polariser is configured so as to only allow light polarised at a particular angle to be transmitted through out the front of the display. This specific polarising angle is the angle
15 at which light is normally twisted to by the liquid crystals.

When an electric field is applied to a region containing liquid crystals, the field causes these crystals to turn to a new orientation. Polarised light hitting the newly orientated crystals will be twisted through a different angle, and hence will not be
20 transmitted through the last polariser.

In this manner a selectively applied electric field causes light to be transmitted through certain regions of a display and absorbed by certain regions of a display, hence creating a display surface which may be electronically controlled. Modern liquid crystal displays
25 have improved on this basic description by adding coloured filters so colours other than white or black may be displayed.

However, due to the design of such liquid crystal or LC displays, the image presented contains a number of faults.

The use of two polarisers in a standard LC display significantly cuts down the angles from which the display may be viewed to observe a well-resolved image. If viewed from a wide angle LC images tend to lose cohesion as compared to the images viewed
5 from directly in front of the display.

The use of the two polarisers in standard LC displays also significantly cuts down the amount of light transmitted through the display. In most instances a strong background light source must be used to ensure that enough light is transmitted through
10 the display to illuminate images for an observer.

The use of the two polarisers in the construction of the above LC display also increases the manufacturing time and cost for such a device. Extra time and money is required to apply the polarising layers to opposite sides of a display.

15 The process to create alignment layers in a standard parallel fashion is well developed.

Variations on the LC display have incorporated dispersed polymers in the liquid crystal. These displays effectively diffuse output light dependant on orientation of foreign particles dispersed within the
20 liquid crystal.

This use of polymer dispersed liquid crystals is limited by the costs associated with production and the clarity of image produced. Generally these types of displays are used as light switches in large sizes such as windows.

25 The applicants have found standard liquid crystal displays to be deficient when applied in deep video imaging technology. Deep video imaging technology is the subject of co-pending New Zealand Patent Application Nos. NZ314566, NZ 328074 and NZ 329130 as well as PCT Application Nos. PCT/NZ 98/ 00098

Deep video imaging relates to a new method and apparatus for displaying images. A "deep" video image is formed by two or more display screens combined together so that an observer may see an image on the first screen closest to them as well as an image on a second screen behind the first screen. The view seen by an observer may be defined as a 'composite image', which is formed from images displayed on each of the screens. Because of the physical displacement between the display screens used, the composite image observed will seem to be three-dimensional. An image on a front screen can recede onto a rear screen and vice versa, creating the illusion of depth.

The applicants have found that liquid crystal displays may be used in deep video imaging applications. A rear screen may be formed from a LC display which includes a backlighting source behind the display. A second LC display may be positioned in front of the rear display and will not include conventional backlighting components, as these would interfere with light transmitted from a rear screen. In effect, the front screen is substantially transparent, allowing light to be transmitted from the rear screen to the eyes of an observer.

The applicants have found the use of combined liquid crystal displays creates a number of faults in the composite image viewed.

Images created on a front screen will be transparent when not black. An observer will be able to look through the front screen (and hence foreground images) onto the rear screen.

Combining two LC displays together in front of an observer creates fringe patterns on the face of the displays. The regular structure associated with the alignment layers of each LC display sets up a pattern in the light transmitted, with the combination of the two patterns creating Moiré interference effects.

Deep video imaging using standard LC displays also have issues with motion parallax and occlusion. An observer at a wide angle from the centre of the display will observe images on the front and rear screens in different positions than the observer viewing the display front on. To provide an observer with a "3D" effect from the display one image processing technique considered is to gradually reduce in size a front screen image and then transfer this image to the rear screen, giving the illusion that the image is moving backwards.

However, this processing technique poses problems when the display is viewed from simultaneous varied angles. When the image from the front screen is transferred to the rear screen, the point at which the image appears to be travelling to on the rear screen, as seen by an observer directly in front of the display is different to that seen by an observer off at an angle. When the front image is transferred to the rear screen some will see the image jump or flick to a new position, ruining the illusion that the front screen image is receding.

An improved display, which solved any or all of the above problems, would be of great advantage over the prior art.

It is an object of the present invention to address the foregoing problems or at least to provide the public with a useful choice.

Further aspects and advantages of the present invention will become apparent from the ensuing description, which is given by way of example only.

DISCLOSURE OF INVENTION

According to one aspect of the present invention there is provided a display which includes at least two retainer (alignment) layers, and

at least one optically active element,

wherein retainer layers are configured to retain active elements in a random homogeneous configuration in a first instance, and

in a regular configuration in the second instance.

- 5 According to further aspect of the present invention there is provided a retainer layer adapted for use in a display as described above, wherein the retainer layer is configured to retain optically active elements in irregular orientations.

10 According to yet another aspect of the present invention there is provided a method of operating displays substantially as described above wherein the method is characterised by the steps of:

- a) selectively applying a field to a first region containing at least two active elements, and
- b) aligning active elements within said region with each other to
15 have substantially the same orientation, and
- c) transmitting light through the first region so that the light exhibits a first characteristic, and
- d) transmitting light through regions other than the first region so that the transmitted light exhibits a second characteristic.

- 20 In a preferred embodiment the display may be configured using liquid crystal display technology.

Reference for other specifications shall now be made to the display as being a device which uses liquid crystal technology. However, it should be appreciated by those skilled in the art that other forms of
25 display may be used in conjunction with the present invention and reference to the liquid crystal technology only should in no way be seen as limiting.

In a preferred embodiment a retainer layer may be any type of substantially transparent material which, when configured in groups of two or more layers, may include or retain optically active elements in a particular region.

- 5 In a further preferred embodiment a retainer layer may be formed from transparent plastic materials with an irregular surface on one side of the layer. Such an irregular surface allows optically active elements to be retained within regions on the retainer layer in a large number of orientations, providing retained active elements
10 with an irregular configuration.

In a further preferred embodiment a retainer layer may be constructed from transparent plastic material with small irregular gouges made on one surface of the layer. These irregular gouges allow active elements retained by the layer to lie in a number of
15 different orientations in an irregular configuration.

Reference throughout this specification shall now be made to a retainer layer as being constructed from a transparent plastic material with irregular surface gouges on one surface of the layer. However, it should be appreciated by those skilled in the art that
20 other types of retainer layers such as glass may be used in conjunction with the present invention, and reference to the above should in no way be seen as limiting.

In a preferred embodiment optically active elements may be liquid crystals normally used in a standard liquid display. The properties
25 and characteristics of these crystals are well known and allow them to be readily adapted for use with the present invention.

Alternative embodiments may use other methods in place of standard liquid crystals as optically active elements. Other embodiments may employ any type of optically active material, the

optical properties of which can be readily controlled and manipulated.

Reference throughout this specification shall now be made to optically elements as being liquid crystals. However, it should be appreciated by those skilled in the art that other forms of optically active elements may be used and reference to the above should in no way be seen as limiting.

In a preferred embodiment liquid crystals may be grouped or organised in two different configurations.

10 In a first instance liquid crystals may be retained between two retainer layers with an irregular or randomised configuration. The surface of a retainer layer may be configured so as to allow retained crystals to lie in a large number of orientations or angles with respect to one another.

15 In a second instance crystals may be retained between retainer layers in a regular configuration. In a preferred embodiment crystals may be retained in substantially the same angles and orientations with respect to one another. This regular configuration of the crystals ensures that each crystal acts optically in substantially the same manner on light passing through the crystals.

In a preferred embodiment a field is applied to crystals within a display to orient the crystals within the field into substantially the same or orientation.

25 In a further preferred embodiment the field used is an electric field. Electric fields may be readily generated using standard electrical componentry and may control accurately and precisely small areas or regions containing crystals.

In a preferred embodiment a first region containing at least two liquid crystals may be any number of areas or points on the viewing surface of a display. Further, in embodiments where the present invention is used in a multiple screen display, as with the video imaging technology, a region may incorporate display surface areas from any of the multiple screens used.

In a further embodiment a first region may be defined as any area on a display to which an electric field is applied.

In such an embodiment an electric field may be selectively applied to particular areas of a display to form a first region. The application of an electric field to particular areas will cause crystals to orientate to substantially the same position, and hence to modify incident light with substantially the same effect. However, in regions other than the first region where no electric field is applied, no regular or uniform treatment will be applied to incident light.

In a preferred embodiment crystals within a first region exhibit a first optical characteristic. Conversely crystals outside this first region exhibit a second optical characteristic.

In a further preferred embodiment the first optical characteristic exhibited by crystals within the first region is transparency. Such crystals may be regularly positioned with respect to one another into substantially the same orientations. This regular configuration allows crystals to transmit incident light in substantially the same manner, with these crystals being transparent to a particular polarisation of light.

In a further preferred embodiment the second optical characteristic exhibited by crystals outside of the first region is to act as diffusing elements. The irregular and random orientations of crystals

outside of a first region diffuses light transmitted through the display.

A diffusing element may be defined as any element which diffuses light. Such an element may cause light to spread or scatter in a
5 number of different directions.

Such diffusing elements will make any image viewed on the first region appear diffuse to an observer at a close distance to the screen, and the same image appear opaque to an observer at a great distance away from the screen. As the distance between an
10 observer and the screen increases an image in the first region will appear more and more opaque instead of diffuse.

As can be appreciated by those skilled in the art the irregular configurations of liquid crystals will act to diffuse light transmitted through the display when no electric field is present. Conversely,
15 when an electric field is applied to a region the crystals present are forced into substantially the same orientation, allowing light to be transmitted through the region without being substantially diffused.

The present invention as described above may be used to construct
20 a simple display.

Transparent electrodes may be placed on either face of the display to selectively apply an electric field to specific areas forming a first region. This electric field, or the absence of it, will either allow light to be transmitted through a particular region or to be diffused
25 when passing through another region. Images may be formed on such a display by placing an electric field on regions which are to be transparent whilst ensuring no electric field is present on regions which are to form images. Colour filters from standard LC

displays may also be used in such a display to provide extra colour to the diffused region.

The present invention also allows the colour white to be presented on a display. Normally LC displays cannot display a sharp white colour. To display white on the typical LC display the white
5 backlighting background is used, as crystals are orientated to be transparent in this instance.

This is in contrast to the present invention where sharp white colour may be obtained simply by diffusing light transmitted
10 through selected regions of the display.

The following descriptions relate to the present invention incorporated into multilayered display devices.

In deep video imaging applications a composite image may be formed by the use of two liquid crystal displays, with one display
15 being placed in front of the other and the rear display including the required backlighting components. Separate and distinct images may be observed on each screen, with the spatial displacement between the two screens providing the composite images with three-dimensional qualities.

20 In one embodiment the present invention may be employed within a deep video display.

Reference throughout the specification shall now be made to a display formed with respect to the present invention as being a selective diffusion layer when used in deep video imaging
25 applications. As discussed above, the present invention may be employed to selectively diffuse regions on a display, while leaving other regions transparent.

A deep video imaging display which incorporates two liquid crystal screens may also use three polarising layers only. The first polarising layer may be at the rear of the rear screen, the second between the two screens and the last on the front of the front screen. In normal LC displays two polarising layers per screen are required, as polarised light must be provided to the liquid crystals to ensure the display works effectively. However, in deep video application, with two LC displays, polarised light is already provided to the rear of a front screen, eliminating the need for a fourth polariser in the combined display.

In a preferred embodiment the selective diffusion layer may be positioned between the front and rear screens of a deep video display.

In a further preferred embodiment a deep video display may be configured as described above with three polarising layers. A selective diffusion layer (SDL) may also be positioned between the front screen and the middle polarising layer. The SDL may be used to diffuse polarised light supplied from the middle polarising layer, destroying the front screen's capacity to form an image in a particular region. This in effect allows the SDL to "blank out" a front image.

A deep video display configured with a SDL as discussed above may create the illusion that an image from a front screen disappears or recedes onto a rear screen at exactly the same point for all observers irrespective of viewing angles.

Previously, in deep video imaging application an image transferred from a front screen to a rear screen would appear to jump sideways for an observer out at an angle, to the display and recede smoothly for an observer in front of the display. This effect is eliminated with the use of an SDL configured as discussed above. The SDL

ensures that a front image is transferred to the rear screen at exactly the same point on the rear screen for all observers, eliminating the sideways jump previously observed at an angle out from the centre of the display.

- 5 In yet another embodiment of the present invention a selective diffusion layer may be positioned between two LC displays, this time with polarising layers behind and in front of each LC display. The selective diffusion layer may be positioned in front of the rear screens front polariser and behind the front screens rear polariser.
- 10 The selective diffusion layer may be used to diffuse polarised light from a rear screen, making an image on a front screen appear solid. The selective diffusion layer will diffuse out the rear image while still providing enough light to illuminate a front image. Previously, in deep video imaging displays without selective
- 15 diffusion layers, images on a front screen have appeared transparent, where images on a rear screen can be seen through a front image. With the use of a selective diffusion layer, images from a rear screen may be "blanked out" by the selective diffusion layer (SDL), making the front images appear solid.
- 20 In yet another embodiment the display may be configured with a first polarising layer, a rear LC screen, a second polarising layer, a first selective diffusion layer, a second LC display, a third polarising layer, a second selective diffusion layer, a fourth polarising layer, a third front LC display and lastly a fifth
- 25 polarising layer. Such a deep video display combines principles employed in the two other deep video application discussed above.

The second SDL will diffuse light transmitted from the rear and middle screens, making images on the front screen appear solid. The first SDL will diffuse light transmitted to the second LC

30 display, allowing an image from the second LC display to

disappear at the same point on the rear LC display for all observers as discussed above.

A selective diffusion layer may also be used in deep video applications to eliminate interference effects. Normally when a
5 standard LC display is viewed through another LC display interference patterns caused by the structure of the two displays will be observed.

Interference patterns can be eliminated with an SDL between two screens if the SDL provides a low uniform level of diffusion over
10 the entire display surface. The diffusion will act to randomise or break up any patterns in light from a rear screen - removing interference effects.

The present invention provides many advantages over existing prior art liquid crystal displays and deep video imaging displays.

15 The present invention may be employed in deep video imaging applications to create a display with foreground images which may appear solid and which can be made to appear to recede on to the same point on a rear screen irrespective of viewing angle.

20

BRIEF DESCRIPTION OF DRAWINGS

Further aspects of the present invention will become apparent from the following description which is given by way of example only and with reference to the accompanying drawings in which:

25 Figure 1 shows the displays effect on light within specific regions in one embodiment: and

Figures 2 - 4 illustrate the present invention as employed in deep video imaging applications in further embodiments of the present invention.

BEST MODES FOR CARRYING OUT THE INVENTION

- 5 Figure 1 shows how the present invention modifies light transmitted through a display. In Figure 1a an electric field is applied to a region of a display, whereas in Figure 1b no electric field is applied to the same region.

10 In both cases unpolarised light 1 is directed towards a rear alignment layer 2 through the liquid crystals (not shown) retained within the region, and then out through the front alignment layer 3.

15 In Figure 1a an electric field is applied to the region. The liquid crystals within this region align with substantially the same orientation, allowing the incident unpolarised light 1 to pass through the crystals and out through the front alignment layer 3. The output from this screen 5 is substantially the same as the incident light 1.

20 This can be contrasted with light passed through the region when an electric field is not present, as in the case of Figure 1b. In this instance the liquid crystals between the two alignment layers 2,3 create diffused light 6 from the incident non-polarised light 1. This diffused light 6 is then passed out through the front alignment layer 3 as the display output 7.

- 25 As can be seen from the diagrams, the application of an electric field within a region will make the liquid crystals substantially transparent to incident light. The absence of an electric field in a region will cause the light transmitted to be diffused.

Figures 2 to 4 illustrate the present invention when used in a number of deep video imaging applications.

Figure 2 shows a deep video imaging application which incorporates a selective diffusion layer d1. The deep video imaging display includes a rear screen s1 and a front screen s2 with polarising layers p1, p2 on either side of the rear screen s1, and polarising layers p3, p4 on either side of the front screen s2.

The selective diffusion layer of SDL, d1 is placed in between the polarising layer p2 and p3. The SDL d1 diffuses polarised light from p2, destroying images presented on the rear screen s1. This effect makes an image on the front screen s2 appear solid, as now only diffused background light is provided behind s2's image.

Figure 3 illustrates another application for the present invention in a deep video imaging application. In this embodiment the deep video imaging screen includes a rear screen s1 a front screen s2, polarising layers p1 and p2 on either side of the rear screen s1, and a last polarising layer p3 on the front of the front screen s2. An SDL d1 is positioned between polarising layer p2 and the front screen s2.

The SDL d1 may diffuse the polarised light provided by polariser p2. Depolarising the background light for front screen s2 will prevent s2 from forming a coherent image. The SLD d1 may be used to "blank out" an image on the front screen s2. This phenomenon can be utilised as discussed above to make an image on the front screen disappear at the same point on a rear screen for all observers, independent of viewing angle.

Figure 4 shows a deep video imaging display that uses the two configurations previously discussed with respect to Figures 2 and 3.

The selective diffusion layer d2 may be used to diffuse light and images from rear screen s1 and middle screen s2, making images on the front screen s3 appear solid. Selective diffusion layer d1 may be used to diffuse polarised light from polarising layer p2,
5 “blanking out” images on middle screen s2.

This display configuration using the present invention may be used to make images on a front screen s3 appear solid, and images on middle screen s2 disappear onto the rear screen s1 at the same point for all observers irrespective of viewing angles.

10 Aspects of the present invention have been described by way of example only and it should be appreciated that modifications and additions may be made thereto without departing from the scope thereof.

CLAIMS

1. A display, based on a switching device, that by means of
5 incorporating random homogeneous alignment layer(s) can be
changed as required from transmitting light to diffusing light.
2. A display incorporating liquid crystal material between random
homogenous alignment layer(s) with a method of applying an
10 electric field to such liquid crystal
3. A display incorporating cell(s) of liquid crystal material between
random homogenous alignment layer(s) with a method of
applying an electric field to individual cells which results in
15 diffusion of transmitted light (backlight).
4. A display incorporating cell(s) of liquid crystal material between
random homogenous alignment layer(s) with a method of
applying an electric field to individual cells which results in
20 diffusion of reflected light.
5. A display as in Claim 3 that diffuses a transmitted pattern of
light to display an image
- 25 6. A display as in Claim 5, with the pattern being mono colored
pattern
7. As display as in Claim 5, with the pattern being multicolored
- 30 8. A display as in Claim 7, with said pattern being a red, green,
blue filter.

9. A display, based on a switching device, that by means of incorporating random homogeneous alignment layer(s) can be changed as required from transmitting light to diffusing light
5 incorporated into a display device to improve angle of view.
10. A display incorporating liquid crystal material between random homogenous alignment layer(s) with a method of applying an electric field to such liquid crystal in combination with a
10 convention LCD which selectively diffuses polarized light from images presented through the screen to which it is attached.
11. A multilayer display which includes a layer which incorporates liquid crystal material between random homogenous alignment
15 layer(s) with a method of applying an electric field to such liquid crystal, with said device being placed at a distance from a transmissive display device, to selectively block polarized light from reaching an LCD layer in the said multilayered display.
- 20 12. A multilayer display which includes a layer which incorporates liquid crystal material between random homogenous alignment layer(s) with a method of applying an electric field to such liquid crystal, with said device being placed close to a transmissive display device to selectively diffuse light prior to it
25 reaching an LCD layer in said multilayered display.

1 / 4

Figure 1b

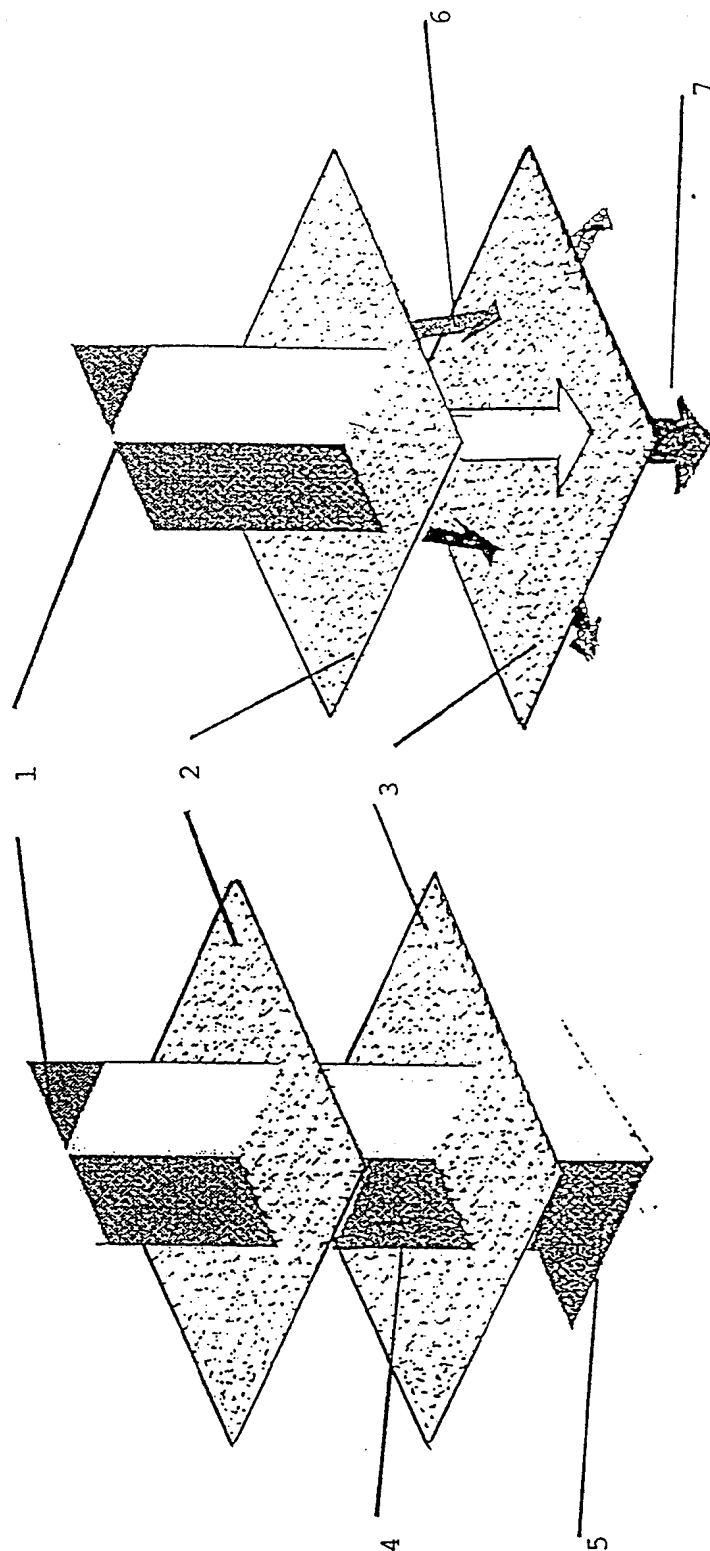


Fig. 2

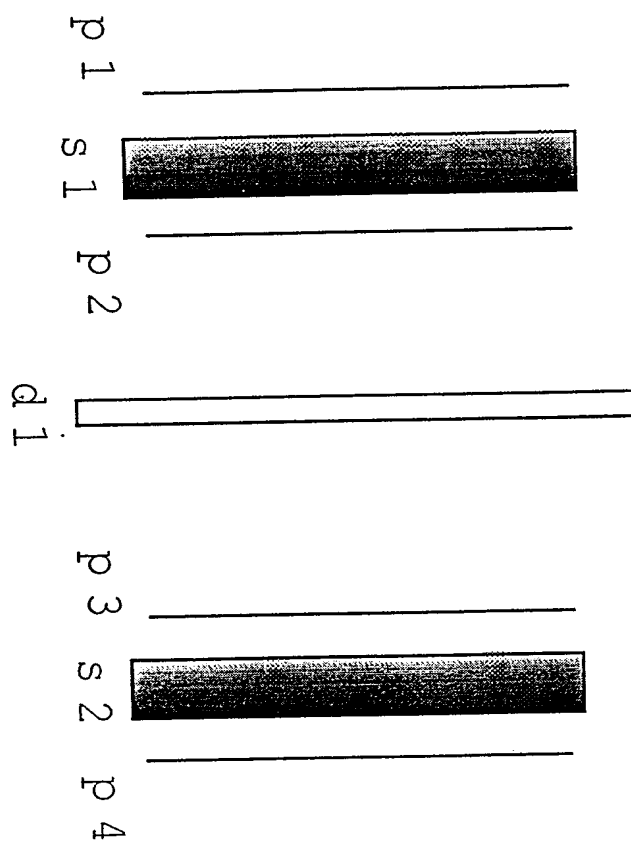


Fig. 3


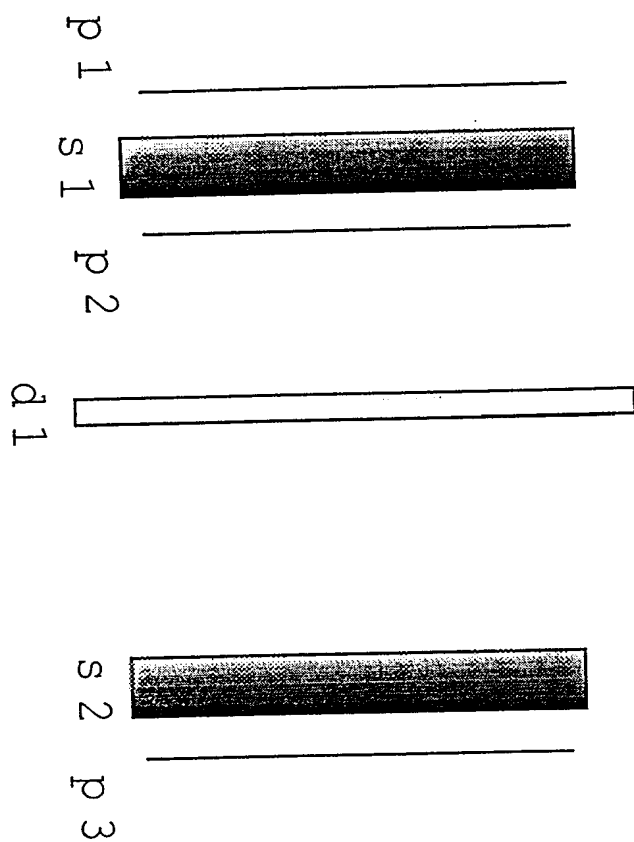


Fig. 4

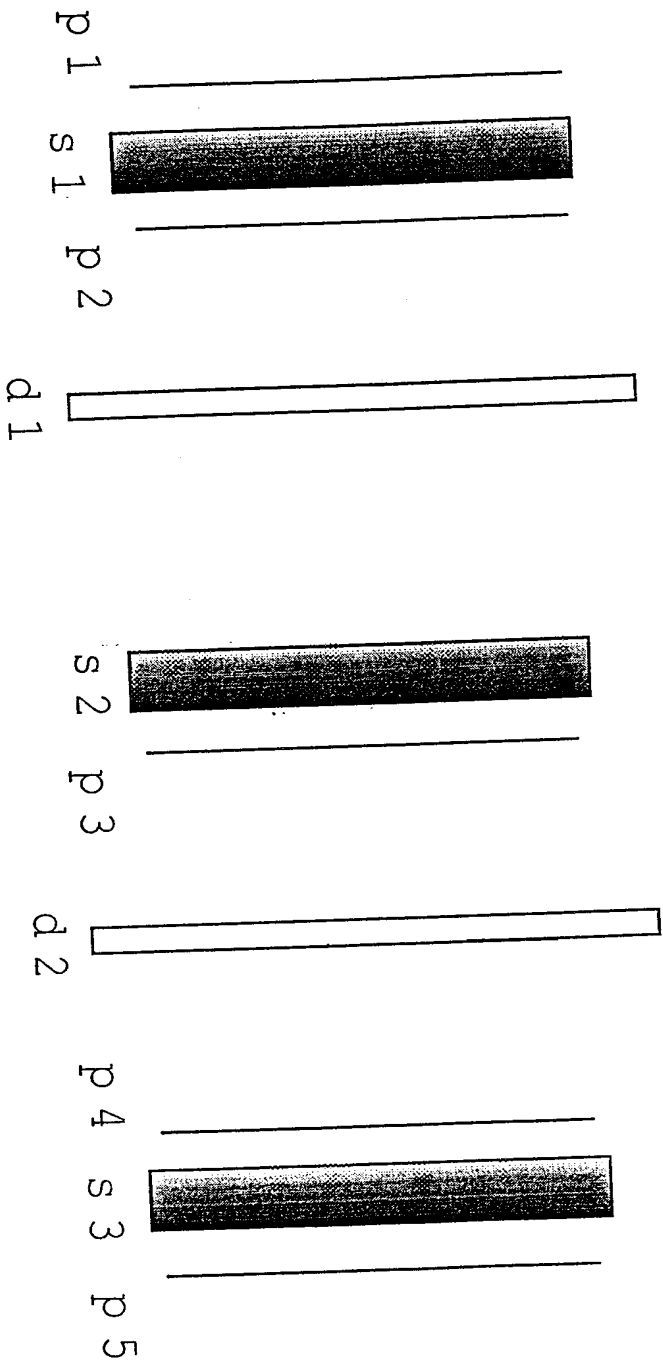

INTERNATIONAL SEARCH REPORT

Int. :ional Application No

PCT/NZ 99/00021

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 G02F1/137 G02F1/1337 G02B27/22 H04N13/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G02F G02B H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 017, no. 526 (P-1617), 21 September 1993 & JP 05 142515 A (RICOH CO LTD), 11 June 1993	1-6
A	see abstract; figures ---	9-12
X	US 4 165 922 A (MORRISSY JOSEPH H) 28 August 1979	1-6
A	see column 2, line 24 - line 36 see figure 1 ---	9-12
P,X	WO 98 16869 A (CHIDICHIMO GIUSEPPE ;FILPO GIOVANNI DE (IT); S P S SPA (IT)) 23 April 1998	1-6
P,A	see abstract; figures 1-10 ---	9-12
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

17 June 1999

Date of mailing of the international search report

24/06/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ward, S

INTERNATIONAL SEARCH REPORT

International Application No

PCT/NZ 99/00021

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 92 09003 A (CHISSO CORP) 29 May 1992 see abstract; figures ---	1-6,9-12
A	TOMOHIKO HATTORI ET AL: "SPATIAL MODULATION DISPLAY USING SPATIAL LIGHT MODULATORS" OPTICAL ENGINEERING, vol. 31, no. 2, 1 February 1992, pages 350-352, XP000257543 see the whole document ---	1-12
A	WO 91 12554 A (RAYCHEM CORP) 22 August 1991 see abstract; figures ---	1-6,9-12
A	WO 91 15930 A (RAYCHEM CORP) 17 October 1991 see abstract; figures ---	1-6,9-12
A	US 4 472 737 A (IWASAKI KENJI) 18 September 1984 see abstract; figures ---	1-6,9-12
A	EP 0 195 584 A (TEKTRONIX INC) 24 September 1986 see abstract; figures -----	1-6,9-12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/NZ 99/00021

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4165922 A	28-08-1979	GB 1543599 A FR 2350621 A	04-04-1979 02-12-1977
WO 9816869 A	23-04-1998	IT PD960248 A AU 5049698 A	14-04-1998 11-05-1998
WO 9209003 A	29-05-1992	JP 4349423 A JP 5053088 A JP 4178631 A	03-12-1992 05-03-1993 25-06-1992
WO 9112554 A	22-08-1991	US 5113272 A AT 122157 T CA 2075807 A DE 69109471 D DE 69109471 T EP 0515533 A JP 5504210 T	12-05-1992 15-05-1995 13-08-1991 08-06-1995 01-02-1996 02-12-1992 01-07-1993
WO 9115930 A	17-10-1991	NONE	
US 4472737 A	18-09-1984	NONE	
EP 0195584 A	24-09-1986	US 4670744 A CA 1257025 A JP 61212821 A	02-06-1987 04-07-1989 20-09-1986